
ESIGN-A-FLANGE

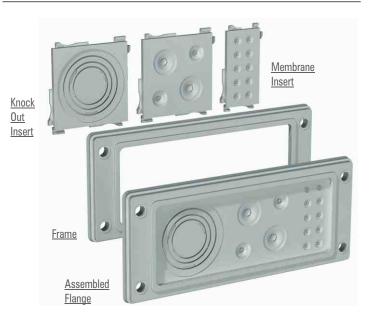

The Design – A – Flange system is a new and unique concept in which you can have the ease of choosing from a combination of frames and modular inserts to create you very own customized flange for control panels and junction boxes.

The Fiberglass re-enforced Polypropylene Inserts are very rigid and carry soft TPE, push-out membrane seals of various sizes good enough to accommodate wire sizes ranging from 4 mm to 50 mm dia. The push out membranes ensure that an IP65 grade protection level is achieved.

Frames are available in two sizes FL21 and FL13 which can accommodate a combination of inserts. Once the inserts are assembled together and inserted into the frame they lock on to the frame and to each other ensuring that a very rigid patented Flange system is created with IP65 grade protection.


In case kink-protection is required for cables so that the weight of the cables to do stress the connections (inside the panel) the membranes can be easily cut out and replaced with either high protection class grommets (page no. 3) or with cable glands (page no. 2)

Material	Fiberglass re-inforced Polypropylene and TPE - Halogen Free UL approved materials				
Colour	RAL 7035 (Light Grey)				
Protection Class	IP 65				
Temperature Range	-20°C to +125°C				
Test Standards	EN 60529:1991 + A1, EN 60670-1:2005				

Frame Cat. No. & Dimensions 11 Cat. No. L1 L2 Н FL 21 214 90 9 FL 13 134 52 6.5

Combination of Inserts that can be used with Frames								
Comb	oinations	nations A B C Representative Dr		Representative Drawing				
FL 21	68 x 68	2	1	-	68:34 68:34 68:34 68:34 68:34			
	68 x 34	1	3	5	0004 0004 0004 0005			
FL 13	34 x 68	1	-	-	34x34 34x34 34x34			
	34 x 34	1	3	-	3434 3434 3434			

INSERTS FOR FL21 FRAME

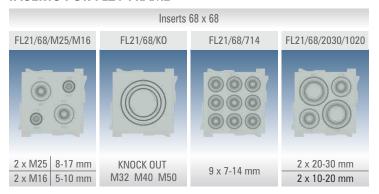



INSERTS FOR FL13 FRAME

	Inserts 34 x 34		
FL13/68/817	FL13/68/M20	FL13/68/410	FL13/34/M20
	201201	00000	0
2 x 8-17 mm	2 x M20 6-13 mm	10 x 4-10 mm	1 x M20 6-13 mm

